PPF Select
(Cap Sheet)

Technical Data Sheet

LEGEND® Select Paint Protection Film offers an ideal combination of protection against rocks, insects, sand, salt, and other hazards high gloss appearance and fast self-healing top coat. All these features are provided in an attractive economical package supported by an outstanding 5-year warranty. Our standard offering – LEGEND® Select PPF protects your paint in virtually any climate zone and weather conditions providing the same ease of installation as other LEGEND® PPF product maintenance.


Product benefits:

- High Gloss and Clarity
- Remarkable ease of installation
- Exceptional scratch, mar and stain resistance
- Great yellowing resistance
- Fast Self-Healing Top Coat
- Long-lasting gloss and cleanliness
- Industry-standard 5-year limited warranty*

Physical Properties		
Test	**Value**	**Standard**
Tensile Strength	8200psi	ASTM D882
Elongation at Break	500%	ASTM D882
Adhesive Peel Force	7.2-10.0 lbs/in	ASTM 3330

LEGEND® PPF Select Construction:
Total product thickness is approximately 7 mil (~175micron).

- Protective Cap Sheet - 2mil (50micron)
- Self-Healing Top Coat - 0.5mil (12micron)
- Aliphatic TPU Base - 5mil (127micron)
- Acrylic PS Adhesive - 1.3mil (33micron)
- Matte Siliconized Liner - 3mil (76micron)

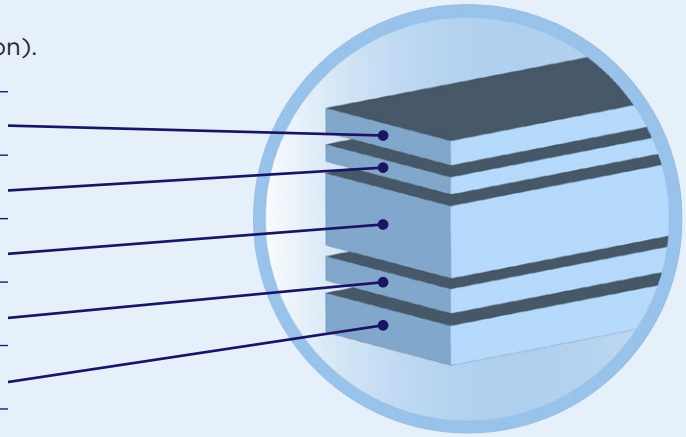

LEGEND® Select Fast Self-Healing Top Coat is formulated for a long-lasting, quick rebound from minor damage such as car wash scratches and scuffs caused by regular driving. Car surface with LEGEND® Select Paint Protection Film installed retains attractive smooth high-gloss appearance for years to come maintenance free.

LEGEND® Select Yellowing, Stain and Chemical resistance is provided by enhanced polymer matrix structure preventing surface staining, yellowing and darkening caused by water-borne contamination as well as contamination by oils, fuels, transmission, radiator, and windshield fluids. Also, LEGEND® Select Paint Protection Film is highly resistant to solvents, acids, bases, bug splatter, and bird droppings.

LEGEND® Select Longevity and Weatherability are proven by extensive QUV and Xenon testing allowing for industry standard 5 year warranty.

LEGEND® Select durability is tested by tensile testing as well as Gravelometer testing designed to evaluate the resistance of vehicle surface coatings to chipping caused by the impacts of gravel and other flying objects in accordance with SAE J400 standard. LEGEND® Paint Protection Film performs to the highest standards set by the market.

LEGEND® PPF USA
Bluegrass Protective Films, LLC.
8770 Trade Street, Unit B
Leland, NC 28451, USA
sales@bpfilmsllc.com
legendppf.com
+1 (812) 850-9095

LEGEND® PPF Canada
LEGEND Films Canada Inc.
10 George Street - Suite 200
Hamilton, ON L8P 1C8, Canada
adwyer@bpfilmsllc.com
legendppf.com
+1 905-577-1789

LEGEND® PPF Europe
LEGEND Europe GmbH
Forstweg 1
14656 Brieselang, Germany
info@legendppf.eu
legendppf.eu
+49 (0) 33232 222840

LEGEND® PPF UK
LEGEND Films UK Ltd
Parkside House, River Way,
Harlow, CM20 2DW
info@legendppf.co.uk
legendppf.co.uk
+44 (0) 1245 791 515

**Contact an authorized distributor/dealer for manufacturer's limited warranty details.*

Your Paint Our Protection®

Copyright © 2025 Bluegrass Protective Films LLC, All Rights Reserved Made in U.S.A. of U.S. and imported components.